


Technical Information

How the energy from a vehicle impact is calculated

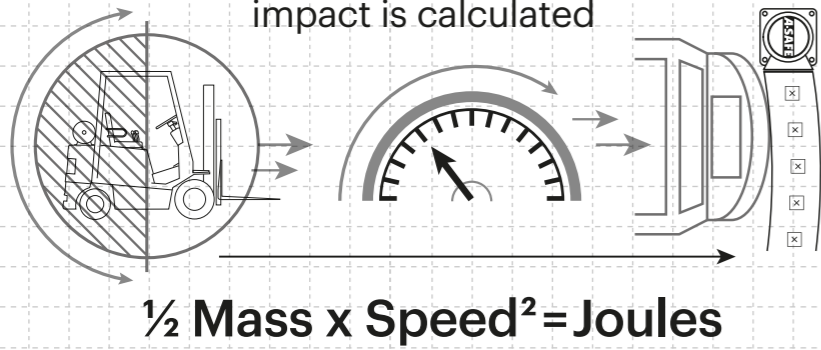

Tested Impact Energy
1,000 Joules
 Equivalent vehicle and speed
 3.3 ton **X** 1.8 mph impact
 90° Impact on RackGuard

Impact Test
 Max Energy (Joules) **1,000**
 Deflection at Max Energy
 1/8 inch

Material Properties	MEMAPLEX TM SUB-ZERO
Temperature Range	-22°F to 32°F
Ignition Temperature	698°F to 734°F
Flash Point	662°F to 698°F
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	1015 - 1016 Ω
Hygiene Seals	No

* Weathering scale 1 is very poor and 5 is excellent
 ** Light stability scale 1 is very poor and 8 is excellent

Racking Profiles


Dimensions (inches)
 X = Impact Zone
 0 - 39%

RackGuard Sizes


Description	A-Rack width (max)	B-Rack depth (max)
RackGuard (S) SL	4	1%
RackGuard (S) ML	4	2%
RackGuard (S) LL	4	3%
RackGuard (S) SLR	3%	1%
RackGuard (S) MLR	3%	2%
RackGuard (S) LLR	3%	3%
RackGuard (L) SL	5	3
RackGuard (L) SLR	4%	3

All RackGuards are available in 15%, 23% and 39% inch heights.

Compression hinges have various widths to fit a range of racking profiles.

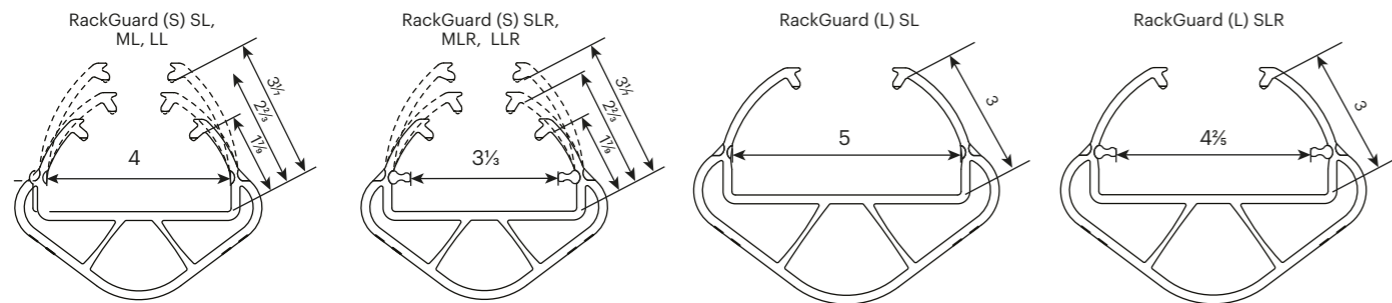

RackGuard Cold Storage Rack Leg Protector

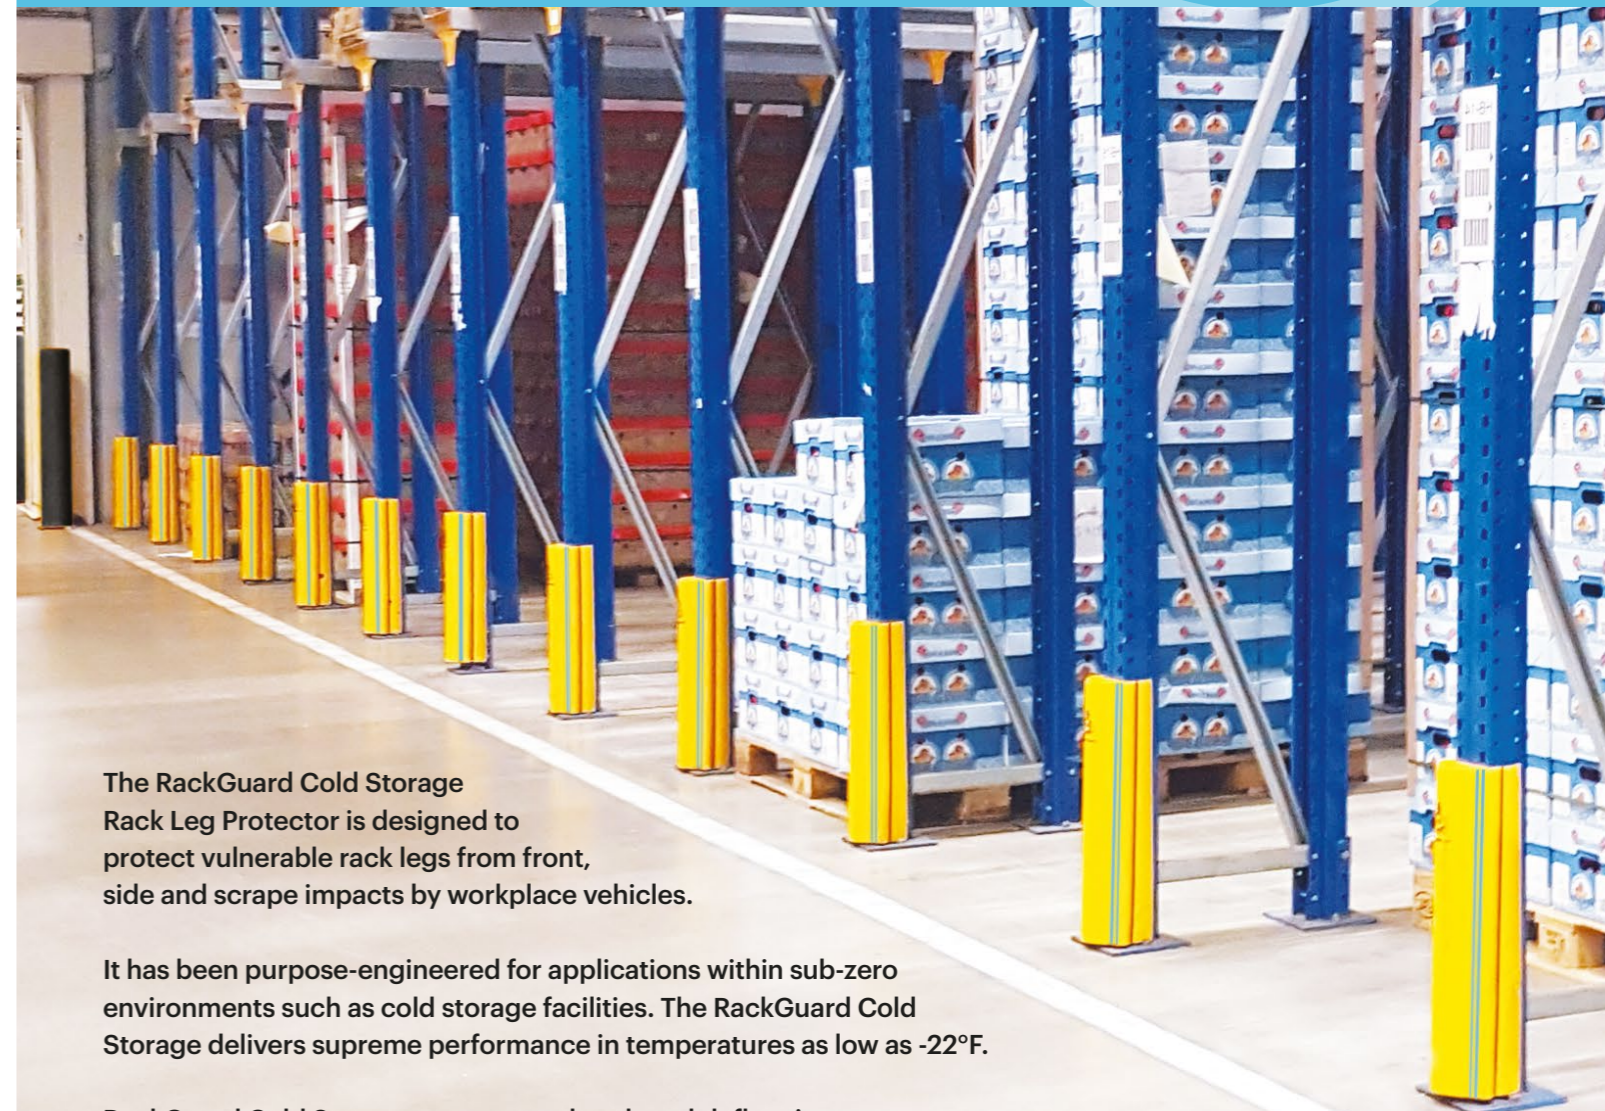

The RackGuard Cold Storage Rack Leg Protector is designed to protect vulnerable rack legs from front, side and scrape impacts by workplace vehicles.

It has been purpose-engineered for applications within sub-zero environments such as cold storage facilities. The RackGuard Cold Storage delivers supreme performance in temperatures as low as -22°F.


RackGuard Cold Storage protectors absorb and deflect impacts, transferring energy around the rack leg rather than through it, preventing damage to uprights and maintaining the structural integrity of racking systems. Frictional grip points ensure a secure fit to any sized rack leg. RackGuard is supplied with specifically developed toolkit for ultra-fast installation.



Your Authorized A-SAFE Distributor
 856-687-2227 • sales@banksindustrial.com • BanksIndustrial.com
 PO Box 382 • Berlin, NJ 08009

Engineered for performance

State-of-the-art products from A-SAFE are meticulously engineered to deliver the highest performance. Designed, developed, tested and manufactured in-house at our cutting-edge facility, every component is purpose-built to function flawlessly and deliver the ultimate in durability.

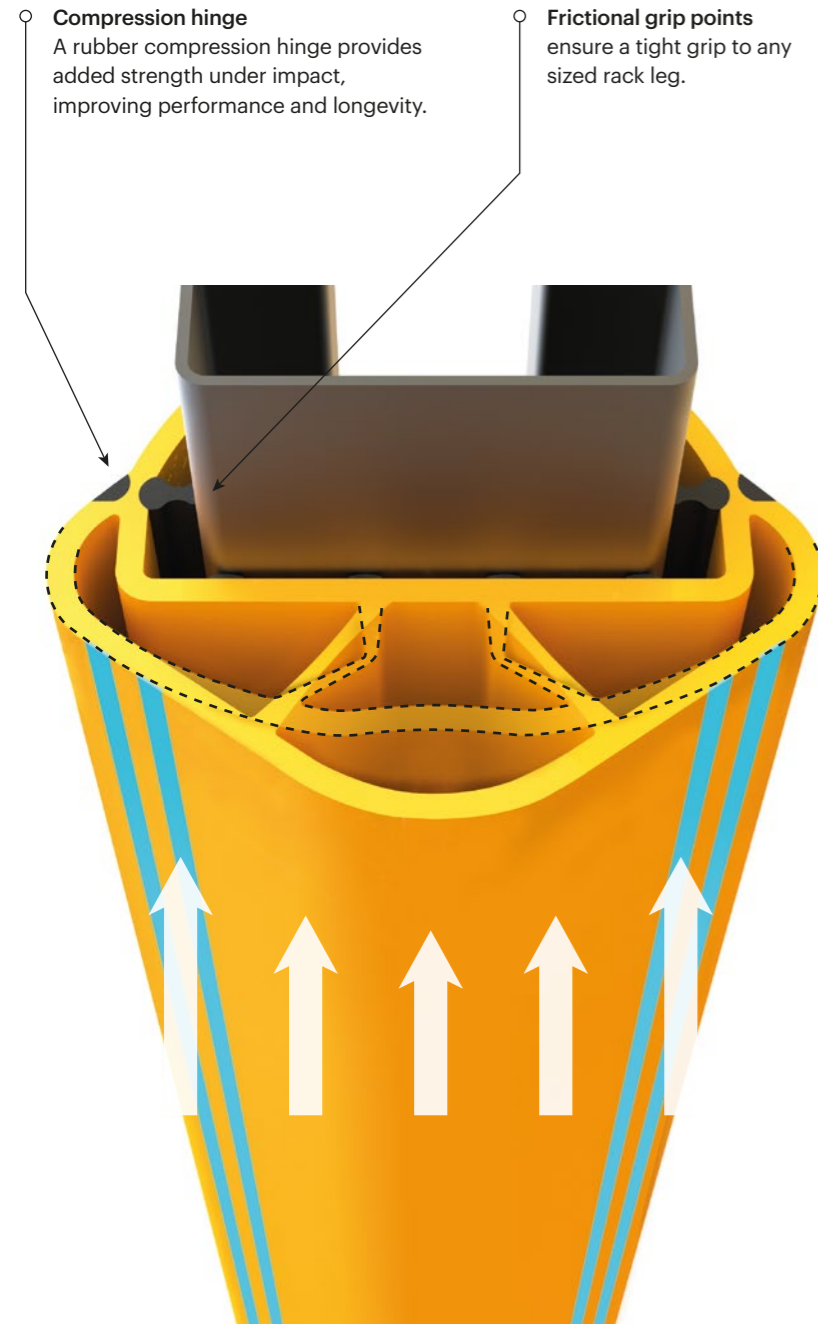

Memaplex™ Sub-Zero
Has been developed by world-class polymer scientists to deliver maximum performance at sub-zero temperatures. Create from a unique blend of polymers, Memaplex Sub-Zero is designed to withstand impacts without cracking or fragmenting.

Ultra-low maintenance material
is chemical and water-resistant, non-corroding, non-scratch and self-colored, so no repainting, rusting, flaking or corrosion.

Huge return on investment
through incident prevention and downtime avoidance, thanks to resilient compression features and unique material that can withstand multiple impacts.

Advanced engineering
Molecular reorientation during manufacturing creates a unique built-in memory that enables the RackGuard to fully recover following impacts.



Ergonomically designed
with a slim profile to limit intrusion into warehouse aisles.

Self colored and UV stabilized
for lasting high visibility, without the need for repainting.

Food safe
wipe-clean, water-resistant surface.


Eco-friendly
and 100% recyclable.



RackGuard is supplied with a specially designed toolkit to ensure it can be installed and removed easily.



RackGuards can also be installed above ground level to protect racks from loading and unloading damage.

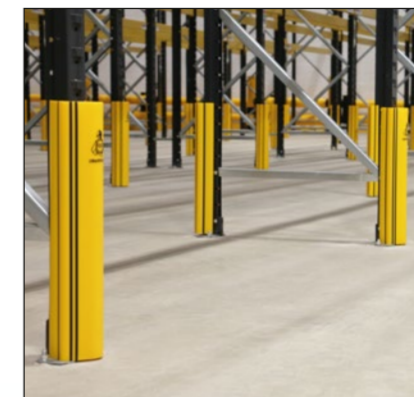

Standard RackGuards are also available.
See separate data sheet for details.



Dual branding option
RackGuard can be personalised with your company logo to create a unified branding experience throughout your warehouse facility. Your logo will be prominently printed above the standard A-SAFE logo on every RackGuard.

TESTED TO THE MAXIMUM

1,000
Max joules of energy

4/5 inch
Max deflection